


PRODUCT

Floor Marking Tape

TECHNICAL DATASHEET

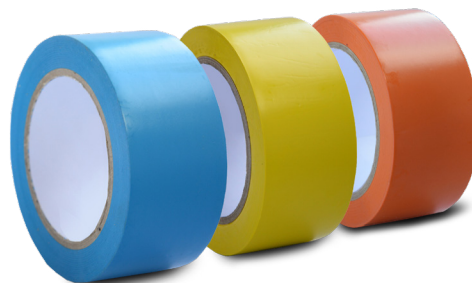

DESCRIPTION

Our highly visible floor tape is ideal for marking boundaries outside of the EPA. It is designed to adhere well to both synthetic and clean, particle-free concrete floors.

The tape consists of a plasticised PVC sheeting coated on one side with a rubber adhesive, the latter consisting mainly of resins and rubber-like materials. The tape contains, as a PVC stabiliser, a small percentage of a water insoluble lead compound.

COLOURS


Yellow




Red



Green



Blue



White




Black



Brown



Orange



FEATURES

- This self-adhesive tape is suitable for marking the boundaries of ESD Protected Areas
- Available in eight highly visible colours
- It adheres very well to synthetic floors such as PVC floor tiles
- The tape will also adhere to concrete floors and can be expected to remain intact for several months depending on traffic
- The tape is not antistatic as it is intended for use outside the EPA

To request a quotation or for more information, please call **+44 (0)1473 836200**
email info@antistat.co.uk or visit www.antistat.co.uk

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2024 Antistat.

SPECIFICATIONS

TECHNICAL PROPERTIES	RESULT
Tape Thickness	0.15mm
Tensile Strength at Break	2.6/14.3
Elongation at Break	150%
Adhesion to Steel	2.0 N/10mm
Adhesion to Self	2.0 N/10mm
Water Extract (1g Taper per 100ml) pH	6.0 - 8.0
Conductivity	Max. 2.5 mS/m
Service Temperature	0°C to 60°C
Application Temperature	5°C to 40°C
Recommended Storage Temperature	10°C to 25°C
Shelf Life	12 months
Length of Roll	33m
Appropriate Specification	BS3887:(1991) Part 2 Category 1 (All colours) (DEF.STAN.75.7/1 (Black/Yellow) only)

PRODUCT CODE	DESCRIPTION	SIZE	COLOUR	QUANTITY
147-0014	Floor Marking Tape	50mm x 33m	Yellow	Per Roll
147-0015	Floor Marking Tape	50mm x 33m	Rad	Per Roll
147-0016	Floor Marking Tape	50mm x 33m	Green	Per Roll
147-0017	Floor Marking Tape	50mm x 33m	White	Per Roll
147-0018	Floor Marking Tape	50mm x 33m	Black	Per Roll
147-0020	Floor Marking Tape	50mm x 33m	Light Blue	Per Roll
147-0021	Floor Marking Tape	50mm x 33m	Brown	Per Roll
147-0024	Floor Marking Tape	50mm x 33m	Orange	Per Roll

To request a quotation or for more information, please call **+44 (0)1473 836200**
 email info@antistat.co.uk or visit www.antistat.co.uk

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2024 Antistat.